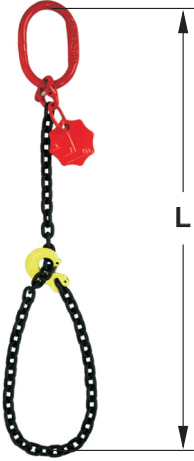

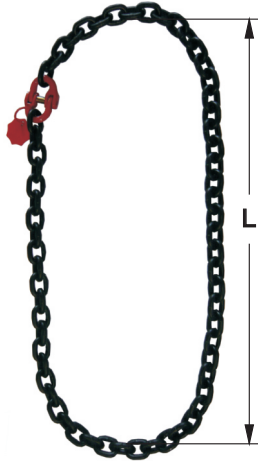


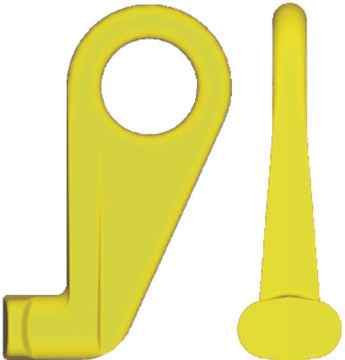


Anschlagketten nach EN 818-4, Güteklasse 8


Laufschlinge - einfach			Kranzkette - einfach			Schlinge - einfach, endlos mit G-Glied	
Maß L = Nutzlänge bei Bestellung angeben							
	1 m Nutzlänge						
Ketten-nenn-dicke mm	Bestell-Nr.	Tragfähigkeit kg 90°	Bestell-Nr.	Tragfähigkeit kg		Bestell-Nr.	Tragfähigkeit geschnürt kg
				0-45°	45-60°		
6	601805	890	601860	1250	900	601900	1800
7	601800	1200	601861	1700	1250	601901	2500
8	601801	1600	601862	2240	1600	601902	3150
10	601802	2520	601863	3350	2500	601903	5000
13	601803	4240	601864	5600	4250	601904	8500
16	601804	6400	601865	9000	6300	601905	12500

auch endlos geschweißte Schlinge erhältlich

Containerhaken CH-3

	
Bestell-Nr.	Typ
60901 60902 60903	CH-3 CH-3 L CH-3 R

Spundwandketten Tragfähigkeit 1600 kg

	
Bestell-Nr.	Typ
601960	AK 4, 12 Glieder

Kurzgehänge unter Last drehbar

	
Bestell-Nr.	Tragfähigkeit kg
601970 601971 601972 601973	2000 3150 5300 8000