


Anschlagpunkte WLP und SLP

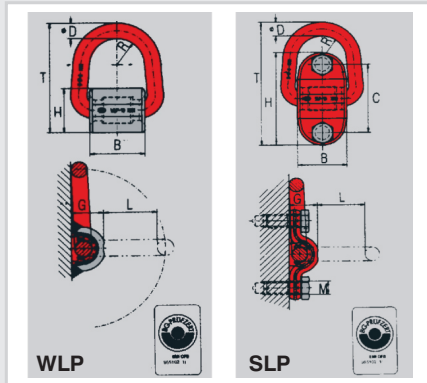

WLP schweißbar

Bestell-Nr.	Bezeichnung	zulässige Zugkraft daN	Tragfähigkeit kg	Eigengewicht kg	Maße in mm						
					B	D	G	H	L	R	T
60642100708	WLP- 1	2000	1000	0,5	50	14	27	38	53	24	95
60642101000	WLP- 3	6000	3000	0,8	58	17	34	48	48	29	97
60642101300	WLP- 5	10000	5000	1,8	64	22	41	61	73	33	135
60642101308	WLP- 8	16000	8000	2,8	63	26	50	72	93	42	165
60642101315	WLP-15	30000	15000	6,0	86	33	70	90	106	50	205


SLP schraubbar

Bestell-Nr.	Bezeichnung	zulässige Zugkraft daN	Tragfähigkeit kg	Eigengewicht kg	Maße in mm							
					B	C	D	H	L	M	T	R
60641100708	SLP-1	2000	1000	0,9	50	72	14	98	55	14	139	24
60641101000	SLP-3	6000	3000	1,4	58	84	17	114	50	16	144	29
60641101300	SLP-5	10000	5000	2,9	64	116	22	160	74	20	203	33

W.L.L. (t)

Bezeichnung								
	0°	0°	90°	90°	0-45°	45-60°	0-45°	45-60°
WLP-1	1	2	1	2	1,4	1	2,1	1,5
WLP-3	3	6	3	6	4,2	3	6,3	4,5
WLP-5	5	10	5	10	7,0	5	10,5	7,5
SLP-1	1	2	1	2	1,4	1	2,1	1,5
SLP-3	3	6	3	6	4,2	3	6,3	4,5
SLP-5	5	10	5	10	7,0	5	10,5	7,5

Anschlagwirbel drehbar hochfest H 92

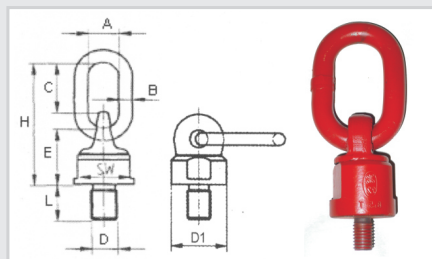

W.L.L. (t)

Bezeichnung								
	0°	0°	90°	90°	0-45°	45-60°	0-45°	45-60°
ASWH- 01218	1,0	2,0	0,50	1,0	0,75	0,50	1,10	0,75
ASWH- 11620	2,0	4,0	1,12	2,0	1,50	1,12	2,36	1,60
ASWH- 22030	4,0	8,0	2,00	4,0	2,80	2,00	4,00	3,00
ASWH- 32430	6,3	12,5	3,15	6,3	4,25	3,15	6,30	4,75
ASWH- 53035	10,6	21,2	5,30	10,6	7,10	5,80	11,20	8,00
ASWH- 83654	12,5	25,0	8,00	16,0	11,20	8,00	16,80	12,00
ASWH-104263	15,0	30,0	10,00	20,0	14,00	10,00	21,20	15,00
ASWH-155678	25,0	50,0	15,00	30,0	21,00	15,00	31,50	22,50